

Z482 (1800 rpm)

GENERAL SPECIFICATION		
Engine model	Z482 (1800 rpm)	
Emission regulation	-	
Type	Vertical, water cooled 4-cycle diesel engine	
Cylinders	2	
Bore and stroke	mm (in)	67.0 x 68.0 (2.64 x 2.68)
Displacement	L (cu.in)	0.479 (29.23)
Aspiration	Naturally aspirated	
Aftertreatment	-	
Stand-by output / speed ^{*1}	kW (HP) / rpm	4.4 (5.9) / 1800
Continuous output / speed ^{*2}	kW (HP) / rpm	4.1 (5.5) / 1800
Combustion system	Indirect injection	
Fuel system	In-line pump	
Length x Width x Height ^{*3} (without aftertreatment unit)	mm (in)	428 x 433 x 564 (16.9 x 17.0 x 22.2)
Length x Width x Height ^{*4} (with aftertreatment unit)	mm (in)	-
Dry weight	kg (lb)	81 (179)

Specifications are subject to change without notice.

Dimensions and dry weight are according to Kubota's standard specification.

Dimensions and weight depend on completed specifications.

*1: SAE J1349 net stand-by

*2: SAE J1349 net continuous



*3: Exclude cooling fan and exclude aftertreatment unit

*4: Exclude cooling fan and include aftertreatment unit on engine



Photographs may show non-standard equipment.

DIMENSIONS

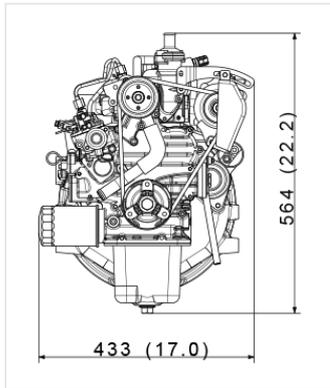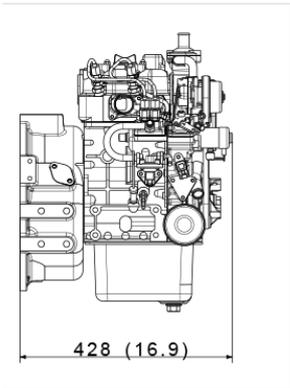

Dimensions and weight depend on composed specifications.

[< back to search results](#)

Copyright Since 2016 KUBOTA Engine Division All rights reserved.