

V3800DI-T-E2-BG2

GENERAL SPECIFICATION

Engine model		V3800DI-T-E2-BG2
Emission regulation		EU Stage II level
Type		Vertical, water cooled 4-cycle diesel engine
Cylinders		4
Bore and stroke	mm (in)	100.0 x 120.0 (3.937 x 4.724)
Displacement	L (cu.in)	3.769 (230.0)
Aspiration		Turbocharged
Aftertreatment		-
Stand-by output / speed ^{*1}	kW (HP) / rpm	42.7 (57.2) / 1500
Continuous output / speed ^{*2}	kW (HP) / rpm	38.8 (52.0) / 1500
Combustion system		Direct injection
Fuel system		In-line pump
Length x Width x Height ^{*3} (without aftertreatment unit)	mm (in)	738 x 544 x 797 (29.1 x 21.4 x 31.4)
Length x Width x Height ^{*4} (with aftertreatment unit)	mm (in)	-
Dry weight	kg (lb)	290 (639)

Specifications are subject to change without notice.

Dimensions and dry weight are according to Kubota's standard specification.

Dimensions and weight depend on completed specifications.

*1: SAE J1349 net stand-by

*2: SAE J1349 net continuous



*3: Exclude cooling fan and exclude aftertreatment unit

*4: Exclude cooling fan and include aftertreatment unit on engine



Photographs may show non-standard equipment.

DIMENSIONS

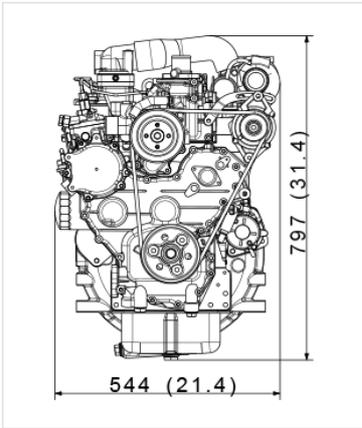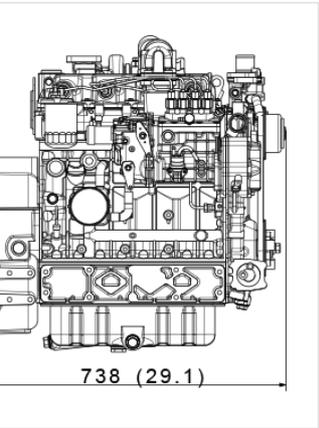

Dimensions and weight depend on composed specifications.

[< back to search results](#)