DT130 – DT145S (G20-60 Hz)

GENERATORS GHADDAR


Gensets
Medium Range

JOHN DEERE POWER

LEROY SOMER

Ratings @ 0.8 PF		Prime Rating	Stand-by Rating	
Voltage*1	Frequency*2	DT130*3	DT145S*4	Alternator
220/380 V	60 Hz	131.8 kVA	145.1 kVA	TAL44H-8S
240/416 V	60 Hz	131.8 kVA	145.1 kVA	TAL44H-8S
127/220 V	60 Hz	133.0 kVA	146.7 kVA	TAL44H-6S
277/480 V	60 Hz	133.0 kVA	146.7 kVA	TAL44H-6S

The above ratings represent the generating set capability guaranteed within ±3% at the reference conditions equivalent to those specified in ISO 8528/1 standard.

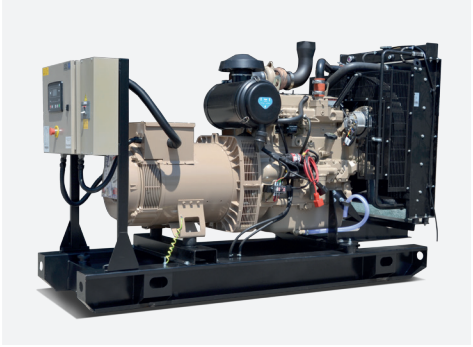

Notes

1. The applicable voltage range is 380V to 480V for 60Hz applications. For other voltages, please consult factory.

2. This generating set is of switchable speed of 1500 rpm & 1800 rpm.

3. DT130 is the prime power rating of the generating set is the nominal power the genset is capable of delivering with a variable load for an unlimited number of hours per year. This rating conforms to ISO8528-1 conditions and ISO 3046 and SAE J1995. Noting that a 10% overload is permitted for 1 hour in every 12-hour operation.

4.DT145S is the standby power rating of the generating set is where a variable load limited to an annual usage up to 500 hours is applied. Noting that no overload is permitted.

Certifications

- The complete Generating Set is type-tested according to ISO 8528-8 Standard.

- The control panel is certified by an ISO 17025 accredited laboratory to have IP55 according to IEC 60355

ISO 17025 ACCREDITED LABORATORY

Certified System Quality ISO 9001 SAI GLOBAL

Engine Technical Data

Make & Model	JOHN DEERE 4045HFG2 - CD24979
Cylinders & Arrangement	4; Vertical in-line
Bore & Stroke (mm)	106 x 127
Induction system	Turbocharged - Aftercooled
Combustion	Direct injection
Cycle	4 stroke
Compression ratio	17.0:1
Cooling System	Water cooled
Displacement	4.5 liters
Lube oil capacity	20.5 liters Max
Coolant capacity	17 liters
Standard governor (Optional)	Mechanical (Electronic)
Engine Speed	1800 rpm
Fuel & [Oil] Cons. (L/H) @ 100% Load	31.4 [0.084] @ 50% Load 16.9 [0.043]
Fuel & [Oil] Cons. (L/H) @ 75% Load	23.9 [0.066] @ 25% Load 8.5 [0.024]
Radiator Cooling Air Flow (m^3/s)	4.2
Emissions regulations	Best Fuel Consumption
Exhaust temperature °C (max)	525
Max exhaust gas flow (m^3/min)	28.4
Max. allowed back pressure (kPa)	7.1

The above performance data are valid as per the following specs:
- Diesel Fuel is according to EN590 or equivalent.
- Lubricating oil is according to Grade SAE 15W-40 API CI4 or CJ4.
- The antifreeze added should be compliant with ASTM D6210.

Dimensions

Length	2200 mm
Width	800 mm
Height	1500 mm
Weight	1250 Kg

Alternator Technical Data

Make & Model	Leroy Somer TAL44H		
Frequency / No. of poles	60Hz / 4P	Winding pitch	2/3
Ingress protection	IP23	AVR model	R120
Insulation class	H	Overspeed	2250 R.P.M.
Terminals (Optional)	6 (12)	Voltage regulation	± 1 %
Excitation system	SHUNT	Coolant air flow	0.34 m^3/s

GHADDAR MACHINERY CO.
www.ghaddar.com

Head Quarters & Factory - Ghazieh, Sidon, Lebanon Tel: +961 7 220 000 Fax: +961 7 221 754 / 223 322 P.O.Box: 110 Sidon -
Email: info@ghaddar.com **Beirut Branch -** Tel: +961 1 847 770 Fax: +961 1 847 775
UAE - Rich Motor Co. FZE Hamriyah Free Zone, Phase II, Sharjah, UAE - Tel: +971 6 526 9111 Fax: +971 6 526 9431 - P.O.Box: 49353 Sharjah.
Nigeria - 10A Akin Adesola Street, Victoria Island, Lagos - Tel: +234 706 890 9333 - Email: drm@genbriteng.com
Saudi Arabia - Rabigh Industrial City, Yanbu Highway, Exit 927, Petro Rabigh Bridge, Rabigh, KSA. Tel: +966 58 373 6543 E-mail: ahmad@ghaddar.com
Iraq - Baghdad, Al Karrada, Al Taharriyat Square, facing the Orthodox Cathedral, Tel: +964 782 112 1122 E-mail: m.najem@ghaddar.com

DT130 – DT145S (G20-60 Hz)

GENERATORS GHADDAR

Gensets
Medium Range

JOHN DEERE POWER

LEROY SOMER

Control Panel Specifications

GMP260MKIII (DSE6110 MKIII) panel is an automatic start generating set panel of microprocessor-based design which is capable of interfacing with electronic engine through the can-bus J1939. It is fully configurable by PC software, yet most settings can be programmed by front fascia buttons. If Mains voltage is to be monitored, DSE6120MKIII can be offered.

Circuit Breaker Schneider or ABB, 3 Pole MCB (4 Pole available as Optional)



Construction

Sheet Fabrication	CNC shearing & bending
Paint type	Heat-treated powder-coated
Paint application	Electrostatic corona spraying
Durability tests	• IMPACT [EN ISO 6272] • Salt spray resistance [ASTM B117-73] • Humidity Resistance [ASTM D2247]
Compliance	• Panel is compliant with [ISO8528-8] • Clearance & Creepage [IEC60355-1] • Leakage current & Dielectric strength [IEC60355-1] • Protection against electric shock [IEC600 364-4-41]
Degree of protection	IP55
Wire crimping	• Crimping force up to 20KN • Accuracy of 0.01mm • Each crimping is checked by Komax CFA+
Wire coding	• Wires are coded by wire color and cross-section • Wires are coded by printed numbers • Wires are coded by printed function of the wire

Protection (standard)	(OPTIONAL Note 1,3)	Control (standard)	(OPTIONAL Note 1)	Instrumentation (standard)	(OPTIONAL Note 1,3)
Over /Under AC voltage	High oil temperature	Remote start input	Battery Changer: 5A, 10A , UL	Gen AC Voltage: 3ph VLL & VLN	Lube oil temperature
Over /Under frequency	High exhaust temperature	Emergency Stop button	Fuel pump control	Gen Frequency: Hz	Exhaust temperature
Delayed Over current	Low fuel pressure	Common Alarm volt-free contact	Extension:	Gen Current: 3 phase A	Engine Inlet air (Boost) pressure
Short-circuit	Low coolant pressure	Event log (100 events)	Ethernet –Modbus TCP	Power: KW, KVA, KVAR & PF	Charging ammeter
Over KW	Low fuel level	Weekly Exerciser	RS485- Modbus RTU	Energy: KWhr, KVAhr, KVARhr	Fuel pressure
High Engine Temperature	Low oil level	Audible Alarm	GPS tracker	Lube Oil pressure	Coolant pressure
Low oil pressure	High winding temperature	Standard CANbus J1939	Water in Fuel Detection	Engine coolant temperature	Fuel level
Maintenance Alarm	High bearing temperature	Pre/Post heat control		Battery DC Voltage	Lube oil level
High/Low Battery voltage	Low boost pressure			DC Alternator Voltage	Winding temperature 3xRTD
Low coolant level Note 2	Fusible link fire protection			Engine Speed	Bearing temperature RTD
	Low coolant temperature			Operating hours	

Note 1: some OPTIONAL features could be standard if CANbus is established within electronic engines.
Note 2: Low coolant level protection is standard feature for Gensets above 200KVA, otherwise it is optional.
Note 3: There is limitation in the number of protections and measurements that can be offered with GMP260MKIII.

Other types of control Panels & Modules can be offered according to required specifications (DSE 7310/20, 7410/20, 8610, 8810 and Others).

GHADDAR MACHINERY CO.
www.ghaddar.com

Head Quarters & Factory - Ghazieh, Sidon, Lebanon Tel: +961 7 220 000 Fax: +961 7 221 754 / 223 322 P.O.Box: 110 Sidon - Email: info@ghaddar.com **Beirut Branch -** Tel: +961 1 847 770 Fax: +961 1 847 775
UAE - Rich Motor Co. FZE Hamriyah Free Zone, Phase II, Sharjah, UAE - Tel: +971 6 526 9111 Fax: +971 6 526 9431 - P.O.Box: 49353 Sharjah.
Nigeria - 10A Akin Adesola Street, Victoria Island, Lagos - Tel: +234 706 890 9333 - Email: drm@genbriteng.com
Saudi Arabia - Rabigh Industrial City, Yanbu Highway, Exit 927, Petro Rabigh Bridge, Rabigh, KSA. Tel: +966 58 373 6543 E-mail: ahmad@ghaddar.com
Iraq - Baghdad, Al Karrada, Al Taharriyat Square, facing the Orthodox Cathedral, Tel: +964 782 112 1122 E-mail: m.najem@ghaddar.com

DT130 – DT145S (G20-60 Hz)

GENERATORS GHADDAR

Gensets
Medium Range

JOHN DEERE POWER

LEROY SOMER

Genset Standard Features

Assembly:
Gensets are assembled at Ghaddar Machinery Factory in compliance with ISO 8528-8 standard.

Fabrication:
- The engine/alternator assembly rests on skid with Anti-vibration mounting pads.
- The skid is made up of durable sheet metals and beams exceeding "Vibration & Torsion" Resistance Norms.
- A skid mounted fuel tank is supplied with fuel gauge, filler cap, fuel inlet and outlet hoses.
- The control panel enclosure is made up of metal sheet .

Paint:
-The skid and control panel enclosure are painted with heat-treated and power-coated electrostati corona spraying.
- Paints passed durability tests conforming to international quality standards.
- Impact (EN ISO 6272)
- Salt Spray Resistance (ASTM B117-73)
- Humidity Resistance (ASTM D2247)

Works-Testing:
- All Gensets are tested prior to dispatch.
- Test is automatically generated and checked according to ISO8528
- Test certificate is issued for each Genset

Equipment:
- Water cooled Radiator with belt driven blower fan and full guarding
- Electric starter with solenoid Relay
- Battery Charging Alternator
- Energized to run solenoid
- Replaceable fuel, oil and air filters
- Heavy duty leads acid battery with matching capacity (Amps & CCA)
- One loose supplied industrial exhaust silencer – 16 DB noise reduction level.
- Integral Fuel Tank with117 L capacity.

Documentation:
- User Manual for Operation, Installation and Maintenance guidance
- Wring Diagram.
- Test Report
- Maintenance Schedule
- Catalogues for Engine, Alternator & AVR

Genset Optional Features

- Manual & Automatic Transfer Switches,
- Synchronizing & Totalizing Panels
- Fuel water separator
- Water jacket heater
- Oil heater
- Fuel heater
- Battery heater
- Anti-condensation Heater
- Air Shut-off Valve
- Oil Sampler
- Pre-lube Oil Pump

GHADDAR MACHINERY CO.
www.ghaddar.com

Head Quarters & Factory - Ghazieh, Sidon, Lebanon Tel: +961 7 220 000 Fax: +961 7 221 754 / 223 322 P.O.Box: 110 Sidon -
Email: info@ghaddar.com **Beirut Branch -** Tel: +961 1 847 770 Fax: +961 1 847 775
UAE - Rich Motor Co. FZE Hamriyah Free Zone, Phase II, Sharjah, UAE - Tel: +971 6 526 9111 Fax: +971 6 526 9431 - P.O.Box: 49353 Sharjah.
Nigeria - 10A Akin Adesola Street, Victoria Island, Lagos - Tel: +234 706 890 9333 - Email: drm@genbriteng.com
Saudi Arabia - Rabigh Industrial City, Yanbu Highway, Exit 927, Petro Rabigh Bridge, Rabigh, KSA. Tel: +966 58 373 6543 E-mail: ahmad@ghaddar.com
Iraq - Baghdad, Al Karrada, Al Taharriyat Square, facing the Orthodox Cathedral, Tel: +964 782 112 1122 E-mail: m.najem@ghaddar.com