

Ratings @ 0.8 PF			Prime Rating	Stand-by Rating
Alternator	Voltage* ¹	Frequency* ²	CT59* ³	CT67S* ⁴
TAL42G (8S)	220/380 V	60 Hz	56.0 kVA	62.0 kVA
TAL42G (8S)	240/415 V	60 Hz	59.0 kVA	67.5 kVA
TAL42H (6S)	127/220 V	60 Hz	56.5 kVA	62.0 kVA
TAL42H (6S)	277/480 V	60 Hz	59.0 kVA	67.5 kVA

The above ratings represent the generating set capability guaranteed within $\pm 3\%$ at the reference conditions equivalent to those specified in ISO 8528/1 standard.

Notes

- The applicable voltage range is 380V to 480V for 60Hz applications. For other voltages, please consult factory.
- This generating set is of single speed of 1800 rpm.
- CT59** is the **prime power** rating of the generating set is where a variable load and unlimited hour usage are applied with an average load factor of 80% of the prime rating over each 24-hour period. Noting that a 10% overload is permitted for 1 hour in every 12-hour operation.
- CT67S** is the **standby power** rating of the generating set is where a variable load limited to an annual usage up to 500 hours is applied, with 300 hours of which may be continuous running. Noting that no overload is permitted.

Certifications



- The complete Generating Set is type-tested according to ISO 8528-8 Standard.

- The control panel is certified by an ISO 17025 accredited laboratory to have IP55 according to IEC 60355

Engine Technical Data

Make & Model

CUMMINS 4BTAA3.3-G17

Cylinders & Arrangement

4; Vertical in-line

Bore & Stroke (mm)

95 x 115

Induction system

Turbo charged air cooled

Combustion

Direct injection

Cycle

4 stroke

Compression ratio

16.3:1

Cooling System

Water cooled

Displacement

3.3 liters

Lube oil capacity

8.0 liters Max

Coolant capacity

13 liters

Standard governor

Electronic

Engine Speed

1800 rpm

Fuel Consumption (L/H) @ 100% Load

14 @ 50% Load 8

Fuel Consumption (L/H) @ 75% Load

11 @ 25% Load 5

Radiator Cooling Air Flow (m³/s)

1.971

Emissions regulations

EPA Tier 3 Certified

Exhaust temperature °C (max)

500

Max exhaust gas flow (m³/min)


15

Max. allowed back pressure (kPa)

10.2

The above performance data are valid as per the following specs:

- Diesel Fuel is according to EN590 standard or equivalent.
- Lubricating oil is according to Grade SAE 15W-40 API C14 or CJ4.
- The anti-freeze added should be compliant with ASTM D6210

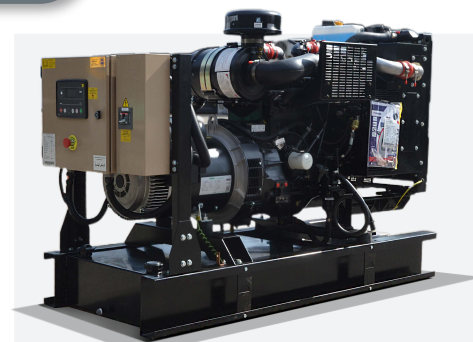

Pictures for Gensets and canopies could vary from actual product.

Dimensions

Length	2000 mm
Width	750 mm
Height	1250 mm
Weight	735 Kg

Alternator Technical Data

Make & Model

Leroy Somer TAL042H/G

Frequency / No. of poles

50Hz / 4P

Winding pitch

2/3

Ingress protection

IP23

AVR model

R120

Insulation class

H

Overspeed

2250 R.P.M.

Terminals (Optional)

6 (12)

Voltage regulation

 $\pm 1\%$

Excitation system (Optional)

SHUNT

Coolant air flow

 0.12 m³/s

Control Panel Specifications

GMP260MK (DSE6110 MKIII) panel is an automatic start generating set panel of microprocessor-based design which is capable of interfacing with electronic engine through the can-bus J1939. It is fully configurable by PC software, yet most settings can be programmed by front fascia buttons. If Mains voltage is to be monitored, DSE6120MKIII can be offered.

Circuit Breaker Schneider or ABB, 3 Pole MCB (4 Pole available as Optional)



Construction

Sheet Fabrication	CNC shearing & bending
Paint type	Heat-treated powder-coated
Paint application	Electrostatic corona spraying • IMPACT [EN ISO 6272]
Durability tests	• Salt spray resistance [ASTM B117-73] • Humidity Resistance [ASTM D2247]
Compliance	• Panel is compliant with [ISO8528-8] • Clearance & Creepage [IEC60355-1] • Leakage current & Dielectric strength [IEC60355-1] • Protection against electric shock [IEC600 364-4-41]
Degree of protection	IP55
Wire crimping	• Crimping force up to 20KN • Accuracy of 0.01mm • Each crimping is checked by Komax CFA+
Wire coding	• Wires are coded by wire color and cross-section • Wires are coded by printed numbers • Wires are coded by printed function of the wire

Protection (standard)

(OPTIONAL Note ^{1,3})

Control (standard)

(OPTIONAL Note ¹)

Instrumentation (standard)

(OPTIONAL Note ^{1,3})

Over /Under AC voltage	High oil temperature	Remote start input	Battery Changer: 5A, 10A, UL	Gen AC Voltage: 3ph VLL & VLN	Lube oil temperature
Over /Under frequency	High exhaust temperature	Emergency Stop button	Fuel pump control	Gen Frequency: Hz	Exhaust temperature
Delayed Over current	Low fuel pressure	Common Alarm volt-free contact	Extension:	Gen Current: 3 phase A	Engine Inlet air (Boost) pressure
Short-circuit	Low coolant pressure	Event log (100 events)	Ethernet –Modbus TCP	Power: KW, KVA, KVAR & PF	Charging ammeter
Over KW	Low fuel level	Weekly Exerciser	RS485– Modbus RTU	Energy: KWhr, KVAhr, KVARhr	Fuel pressure
High Engine Temperature	Low oil level	Audible Alarm	GPS tracker	Lube Oil pressure	Coolant pressure
Low oil pressure	High winding temperature	Standard CANbus J1939	Water in Fuel Detection	Engine coolant temperature	Fuel level
Maintenance Alarm	High bearing temperature	Pre/Post heat controll	Webnet Applications	Battery DC Voltage	Lube oil level
High/Low Battery voltage	Low boost pressure		SNMP Gateway	DC Alternator Voltage	Winding temperature 3xRTD
Low coolant level Note 2	Fusible link fire protection		Inputs: 20 ^{ma} , 10V	Engine Speed	Bearing temperature RTD
	Low coolant temperature		Thermocouples		

Note 1: some OPTIONAL features could be standard if CANbus is established within electronic engines.

Note 2: Low coolant level protection is standard feature for Gensets above 200KVA, otherwise it is optional.

Note 3: There is limitation in the number of protections and measurements that can be offered with GMP260MK.

Other types of control Panels & Modules can be offered according to required specifications (DSE 7310/20, 7410/20, 8610, 8810 and Others).

The control panel is certified by an ISO17025 accredited laboratory to have IP55 according to IEC60355

Genset Standard Features

Assembly:

Gensets are assembled at Ghaddar Machinery Factory in compliance with ISO 8528-8 standard.

Fabrication:

- The engine/alternator assembly rests on skid with Anti-vibration mounting pads.
- The skid is made up of durable sheet metals and beams exceeding "Vibration & Torsion" Resistance Norms.
- A skid mounted fuel tank is supplied with fuel gauge, filler cap, fuel inlet and outlet hoses.
- The control panel enclosure is made up of metal sheet .

Paint:

- The skid and control panel enclosure are painted with heat-treated and power-coated electrostatic corona spraying.
- Paints passed durability tests conforming to international quality standards.
- Impact (EN ISO 6272)
- Salt Spray Resistance (ASTM B117-73)
- Humidity Resistance (ASTM D2247)

Works-Testing:

- All Gensets are tested prior to dispatch.
- Test is automatically generated and checked according to ISO8528
- Test certificate is issued for each Genset

Equipment:

- Water cooled Radiator with belt driven blower fan and full guarding
- Electric starter with solenoid Relay
- Battery Charging Alternator
- Electronic governor with energized to run solenoid
- Replaceable fuel, oil and air filters
- Heavy duty leads acid battery with matching capacity (Amps & CCA)
- One loose supplied industrial exhaust silencer – 16 DB noise reduction level.
- Integral Fuel Tank with 117 L capacity.

Documentation:

- User Manual for Operation, Installation and Maintenance guidance
- Wiring Diagram.
- Test Report
- Maintenance Schedule
- Catalogues for Engine, Alternator & AVR

Genset Optional Features

- Manual & Automatic Transfer Switches,
- Synchronizing & Totalizing Panels
- Fuel water separator
- Water jacket heater
- Oil heater
- Fuel heater
- Battery heater
- Anti-condensation Heater
- Air Shut-off Valve
- Oil Sampler
- Pre-lube Oil Pump